

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representation of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY

As rescanning documents *will not* correct images, please do not report the images to the Image Problem Mailbox.

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G01S 5/14, 1/04, 5/00		A1	(11) International Publication Number: WO 99/19743
			(43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/US98/21709		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 14 October 1998 (14.10.98)			
(30) Priority Data: 08/950,690 15 October 1997 (15.10.97) US			
(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).			
(72) Inventors: CAMP, William, O., Jr.; 400 N. Boundary Street, Chapel Hill, NC 27514 (US). ZANGI, Kambiz; 3212 Quiet Mill Road, Raleigh, NC 27612 (US). RAMESH, Rajaram; 403 Danton Drive, Cary, NC 27511 (US).			
(74) Agents: MOORE, Stanley, R. et al.; Jenkins & Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).			
		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: REDUCED GLOBAL POSITIONING SYSTEM RECEIVER CODE SHIFT SEARCH SPACE FOR A CELLULAR TELEPHONE SYSTEM

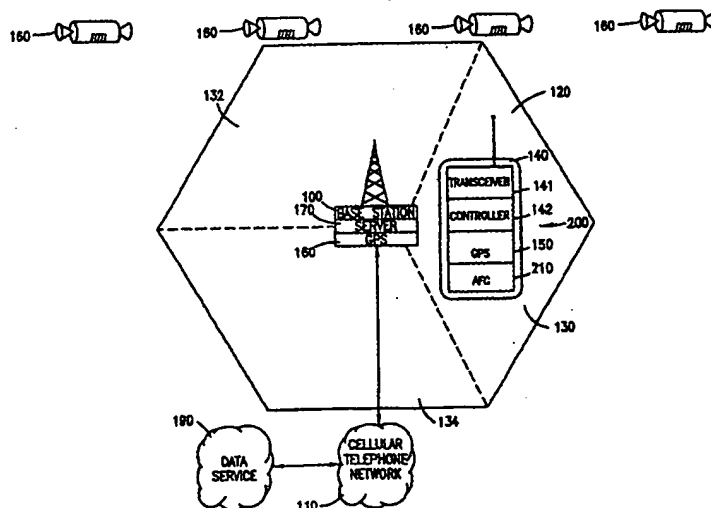

(57) Abstract

A Global Positioning System (GPS) receiver located at a base station of a cellular telephone network determines the location of the base station and obtains GPS ephemeris and, if available, timing information. A server uses the obtained information to calculate auxiliary information for use by a GPS receiver. The base station transmits the auxiliary information to the GPS receiver which is located within a cellular telephone operating within the service area of the base station. The cellular telephone GPS receiver uses the auxiliary information to determine the location of the cellular telephone and transmits location information to the cellular telephone network via the cellular telephone and the base station.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

REDUCED GLOBAL POSITIONING SYSTEM RECEIVER CODE SHIFT
SEARCH SPACE FOR A CELLULAR TELEPHONE SYSTEM

BACKGROUND OF THE INVENTION

5 Technical Field of the Invention

 The present invention pertains in general to a method and apparatus for reducing code shift search space in a Global Positioning System receiver, and more particularly, to reducing code shift search space in a Global
10 Positioning System receiver connected to a cellular mobile station operating within a cellular telephone system.

Description of Related Art

 It is desirable, and likely to be mandatory in the
15 near future, that cellular telephone systems be equipped to determine the geographical location of cellular telephones operating within the cellular telephone system. To meet this requirement it has been proposed that cellular telephones be equipped with Global Positioning
20 System (GPS) receivers for determining the location of the cellular telephone. GPS receivers, however, are expensive, increase the cellular telephone size, and consume limited battery power available to the cellular telephone. Furthermore, GPS receivers do not function
25 well within buildings or in other areas where GPS satellite transmissions are weakened due to an obstruction, fading, reflecting, or the like.

 It is commonly known that GPS receivers can be made smaller, less expensive, and more energy efficient by
30 eliminating certain GPS receiver functionality used to obtain auxiliary information normally obtained through the demodulation of GPS satellite signals. Instead of demodulating the GPS satellite signals, an alternative means is used to provide the GPS receiver with the needed
35 auxiliary information. This auxiliary information

-2-

includes various information such as a list of GPS satellites currently in view of the GPS receiver, Doppler shifts for the listed GPS satellites, and ephemeris data for each of the listed GPS satellites. Eliminating the need for the GPS receiver to demodulate the GPS satellite signals also allows the GPS receiver to integrate the GPS satellite signals over a longer period of time allowing for reception of weakened signals due to obstructions.

In order to calculate the auxiliary information for the GPS receiver, however, the approximate location of the GPS receiver must be known. Moreover, the closer the actual location of the GPS receiver to the location used in calculating the auxiliary information the smaller the resulting location search to be performed by the GPS receiver. For example, it is known that if the GPS receiver is given auxiliary information calculated to a location within a radius of one hundred miles of the actual location of the GPS receiver, the GPS receiver need not measure the actual range to the GPS satellites, but instead, only needs to measure a fraction of a millisecond for each of the ranges. This greatly simplifies the necessary range measurements to that of finding the relative code shift position locations to the one millisecond code cycle. In order to do this, however, the GPS receiver still must search all one thousand twenty three code shift positions for all the GPS satellites to be used in the location solution.

The code shift searches can be performed by means of a combination of a fast Fourier transform and an inverse fast Fourier transform correlator to simultaneously search all the code shift positions. This technique for finding the code shift position of a cyclic sequence is described in textbooks, such as Digital Signal Processing by Oppenheim & Shafer. While such an approach is more computationally efficient than a straight correlation, it is nonetheless, computationally intensive requiring additional functionality and consuming limited battery

-3-

power resources. Furthermore, with the opportunity to convey information to the mobile unit to assist it in its search for the GPS satellite ranges, this method then becomes computationally inefficient as it consumes
5 computation cycles searching for many code shift positions that are not possible.

Another solution to searching all one thousand twenty three shift code positions is to build specific hardware to search multiple code shift positions simultaneously.
10 To date, however, hardware specific solutions have not been able to simultaneously search more than a fraction of code shift positions thus requiring multiple searches and lengthy time delays.

It would be advantageous, therefore, to devise a method and apparatus to reduce the code shift search space
15 required to be performed by a GPS receiver and thus reduce the functionality and time required for a GPS receiver to determine its location. Furthermore, it would be advantageous to devise a method and apparatus for a GPS
20 receiver to obtain auxiliary information for determining its location.

SUMMARY OF THE INVENTION

The present invention comprises a full functionality
25 Global Positioning System (GPS) receiver located at either a base station or at a remote location and connected to a base station via a communication link. The full functionality GPS receiver obtains GPS ephemeris and timing information and communicates this information to
30 a server. Alternatively, the server can obtain the ephemeris data from a data service via the cellular telephone network obviating the need for placing a GPS receiver at the base station. The server then processes the information to calculate auxiliary information for use
35 by a reduced functionality mobile GPS receiver located inside and connected to a cellular telephone operating within the service area of the base station. The base

-4-

station transmits the auxiliary information to the cellular telephone GPS receiver, either on demand by the remote unit, or periodically as a broadcast message. The GPS receiver in the cellular telephone then uses the auxiliary information to search for the code shift positions of all the appropriate codes within the signals coming from the GPS satellites. The pseudo ranges, indicative of the geographical location of the cellular telephone, are calculated from the code shift positions so measured. The cellular telephone then transmits the pseudo ranges to the cellular telephone network and the cellular telephone network calculates the geographical location of the cellular telephone. Alternatively, the cellular telephone determines its geographical location, using the GPS satellite locations derived from the ephemeris data supplied to it, and transmits the geographical location coordinates to the cellular telephone network.

20 BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be acquired by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

25 Figure 1 is a functional block diagram of a preferred embodiment of the present invention;

Figure 2 depicts a plurality of GPS satellites and a known and unknown location illustrating an example for predicting code shift positions;

30 Figure 3 illustrates conveyance of a time reference to a reduced functionality GPS receiver located within a cellular telephone; and

Figure 4 is a flow diagram of the preferred method for implementing the present invention.

-5-

DETAILED DESCRIPTION OF EMBODIMENTS

Referring now to Figure 1 there is illustrated a functional block diagram of a preferred embodiment of the present invention. A cellular telephone base station 100 located in a cell site 120 of a cellular telephone network 110 serves a cellular telephone 140. The cell site 120 is divided into a first sector 130, a second sector 132, and a third sector 134, with Figure 1 illustrating the cellular telephone 140 as being located within the first sector 130. The cellular telephone 140 also includes a reduced functionality GPS receiver 150 which receives GPS satellite transmissions from a plurality of GPS satellites 160. The reduced functionality GPS receiver 150 does not include functionality for demodulating GPS satellite 160 signals and determining auxiliary information. Instead, the auxiliary information necessary for determining location, and which also reduces the range of Doppler frequency shifts to be searched, is provided to the reduced functionality GPS receiver 150 from an alternate source. The present invention supplements the auxiliary information with a known location within the antenna pattern coverage area which, when combined with the GPS satellite 160 locations at the time the code shift positions are to be found, reduces the range of code shift positions to be searched from one thousand twenty three to a fraction of one thousand twenty three. The fraction is proportional to the distance between the actual location of the cellular telephone 140 and the known location. The fraction is on the order of the distance from the known location to the cellular telephone 140 in miles, divided by one hundred eighty six miles; one hundred eighty six miles being the distance corresponding to one millisecond of flight time of the GPS satellite 160 signals. The fraction is further determined by the accuracy of the time reference.

-6-

In the preferred embodiment, the known location is either the location of the base station 100 or, alternatively, the center 200 of the sector 130 in which the cellular telephone is located. If a time reference is also conveyed by the base station 100, all code shift searches are reduced to a fraction of one thousand twenty three. If, on the other hand, a time reference is not conveyed by the base station 100, then all one thousand twenty three possible code shift positions are searched for a first GPS satellite 160 and only the fraction of one thousand twenty three code shift positions are searched for the remaining GPS satellites 160.

As stated earlier, the known location within the coverage area of base station 100 is used to calculate the auxiliary information. The location can be determined by any method including the use of a GPS receiver 180 located at the base station 100 or at a server 170 which calculates the auxiliary information. The base station 100 obtains and periodically updates GPS ephemeris information pertaining to the current status of the GPS satellites 160. In a preferred embodiment, the GPS ephemeris information is obtained by the base station 100 from a data service 190 via the cellular telephone network 110. Alternatively, the information can be obtained directly from GPS satellite 160 transmissions received by GPS receiver 180 located at the base station 100 or at the server 170. In the future, when an ancillary GPS related system known as Wide Area Augmentation System (WAAS) becomes operational, the GPS receiver 180 located at the base station 100 or at the server 170 will also be capable of obtaining differential correction information. The differential correction information allows GPS receivers to calculate their location with a higher degree of accuracy.

The server 170, located either at the base station 100 or at a remote location, uses information obtained from either the GPS receiver 180 or the data service 190

-7-

to calculate auxiliary information which is subsequently communicated to the base station 100 and transmitted to the reduced functionality GPS receiver 150 located within the cellular telephone 140. The auxiliary information includes a list of GPS satellites 160 in view of the base station 100, Doppler corrections for each of the listed GPS satellites 160, and code shift positions for each of the listed GPS satellites 160 based upon a universal time coordinated time for the base station 100 location.

If the cell site 120 is divided into multiple sectors and the base station 100 can determine the sector in which the cellular telephone 140 is operating, in this example the first sector 130, the server 170 calculates the auxiliary information based on a center location 200 of the sector 130. Calculating the auxiliary information based on the center location 200 increases the accuracy of the auxiliary information since there is a greater probability that the cellular telephone 140 is located closer to the center location 200 than the base station 100. The geographical coordinates for the center location 200 need not be at the actual center of the sector 130, but instead, can be at a location where cellular telephones are most likely to be located, for example at a shopping mall, office complex, airport, or sporting facility located with the sector. If, however, the cell site 120 is not divided into multiple sectors or if the base station 100 cannot determine the sector in which the cellular telephone 140 is operating, the auxiliary information is calculated based on the geographical location of the base station 100.

In an alternative embodiment, the geographical center location of a Business Transaction Area or Metropolitan Service Area is used instead of the geographical location of the base station 100. Every cellular telephone service area is identified in a System ID (SID) which is read by the cellular telephone 140. The cellular telephone 140 can either store auxiliary information pertaining to these

-8-

locations and reference the information associated with the current SID or the auxiliary information is stored in the server and 170 and the cellular telephone provides the SID to the server 170 which provides the auxiliary information.

After the server 170 calculates the auxiliary information, the base station 100 transmits the auxiliary information to the reduced functionality GPS receiver 150 in the cellular telephone 140. The auxiliary information can be transmitted to the reduced functionality GPS receiver 150 in a variety of ways. For example, in a cellular telephone network using the Global System for Mobile communications protocol (GSM), information can be sent via a short messaging service message, packet data message sent over a traffic channel, or a broadcast message over a control channel. The auxiliary information is sent in a manner consistent with methods commonly known in the industry for the transmission of information between the cellular telephone network 110 and the cellular telephone 140. A transceiver 141 located within the cellular telephone 140 receives the transmissions from the base station 100 and a controller 142, also located within the cellular telephone 140, identifies the information as auxiliary information and provides the reduced functionality GPS receiver 150 with the auxiliary information. Furthermore, the auxiliary information can be transmitted either on demand to a specific cellular telephone or to a plurality of cellular telephones via a broadcast channel.

To obtain a significant reduction in the code shift search space it is desirable that the timing coordination signal be accurate to within fifty microseconds or less of the universal time coordinated time used by the GPS system. Therefore, timing information is transmitted to the reduced functionality GPS receiver 150 via the cellular telephone 140 in a variety of ways depending on the protocol of the cellular telephone network 110. For

-9-

example, in a digital protocol system such as GSM or IS-136 (Digital AMPS), the timing information is communicated via a message which states that a particular frame synchronization number will occur, or has occurred, at a certain time. In an analog Advanced Mobile Phone System (AMPS) system, a time tick consisting of a sharp pulse can be used to denote the reference time for determining the code shift positions for each GPS satellite 160.

The reduced functionality GPS receiver 150 located within the cellular telephone 140 makes use of the auxiliary information to measure code shift positions for each GPS satellite 160. For long integration times, for example 1 second, the actual code shift positions change up to 3 chips per second during the period. This change is compensated for by slipping the timing of the correlation code to stop the change prior to using the code shift position value in the location solution. The code shift positions are translated into delta ranges, measured for example in meters, to each GPS satellite 160. The delta ranges are calculated by subtracting the code shift positions measured from the code shift positions calculated for each GPS satellite 160 location obtained from the ephemeris data at the known location. A vector of these delta ranges, multiplied by the inverse of the matrix of unit vector cosines from the known location to each GPS satellite 160, yields the delta x, delta y, and delta z, from the known location.

Referring additionally now to Figure 2, there is illustrated a plurality of GPS satellites 220_{a-n} , a known location 230 and an unknown location 240 illustrating an example for predicting code shift positions. The calculations described below, are preformed by the server 170 and the predicted code shift positions are transmitted to the reduced functionality GPS receiver 150 as part of the auxiliary information. Alternatively, the calculation can be preformed by the reduced functionality GPS receiver 150. Each of the GPS satellites 220_{a-n} listed in the

-10-

auxiliary information has a set of three dimensional coordinates $(X_{a-n}, Y_{a-n}, Z_{a-n})$. The known location 230 also has a set of three dimensional coordinates (X, Y, Z) . A range R_{a-n} to each GPS satellite 220_{a-n} from the known location 230 is represented by the expression:

$$R_{a-n} = \sqrt{((X_{a-n} - X)^2 + (Y_{a-n} - Y)^2 + (Z_{a-n} - Z)^2)}$$

The signal propagation time T_{a-n} from each of the GPS satellites 220_{a-n} is represented by the expression:

$$T_{a-n} = R_{a-n} / (\text{speed of light})$$

The predicted code shift position C_{a-n} for each of the satellites 220_{a-n} is represented by the expression:

$$C_{a-n} = \text{fractional component of } [(T_{a-n} / 1000)] * 1023;$$

wherein T_{a-n} is divided by one thousand in order to express the signal propagation time in milliseconds and the fractional component of $(T_{a-n} / 1000)$ is used in order that the predicted code shift positions fall within zero to one thousand twenty three, the possible range of code shift positions.

Due to both uncertainties in the time reference and the fact that the unknown location 240, corresponding to the location of the cellular telephone 140, is located some distance from the known location 230, the search space around the predicted code shift positions are expanded to C_{a-n} plus and minus some offset number to create a code shift search space. The offset is based on the size of the service area and the uncertainty in the time reference wherein, larger service areas and increased uncertainty result in larger offsets with the uncertainty in the time reference being the predominant factor.

The reduced functionality GPS receiver 150 searches the code shift search space for the first satellite 220.

-11-

to determine an actual code shift position C'_a for the first satellite 220_a. Since the error is attributed predominantly to the accuracy of the time reference and not the distance between the unknown location 240 and the known location 230, the difference between the predicted code shift position C_a and the measured code shift position C'_a is added to the remaining predicted code shift positions C_{b-n} . This results in a more accurate prediction and thus, a smaller code shift search space.

5 If the resulting predicted code shift positions C_{b-n} remaining after the offset has been added is greater than one thousand twenty three, one thousand twenty three is subtracted from the resulting predicted code shift positions C_{b-n} in order that the predicted code shift positions fall within zero to one thousand twenty three,

10 the possible range of code shift positions.

If the time reference is unavailable, the initial code shift search for the first GPS satellite 220_a requires a search encompassing all one thousand twenty three possible code shift positions. After the initial search, however, the code shift search process for the remaining GPS satellites 220_{b-n} is identical to the process used when the time reference is available. Thus, the difference between the predicted code shift position C_a and the measured code shift position C'_a is added to the remaining predicted code shift positions C_{b-n} resulting in a more accurate prediction and thus, a smaller code shift search space. If the resulting predicted code shift positions C_{b-n} remaining after the offset has been added is greater than one thousand twenty three, one thousand

20 three is subtracted from the resulting predicted code shift positions C_{b-n} in order that the predicted code shift positions fall within zero to one thousand twenty three, the possible range of code shift positions.

35 A vector CD is created from the differences between the measured code shift positions C'_{a-n} and the predicted code shift positions C_{a-n} . These values are often

-12-

expressed in meters by multiplying by the speed of light in meters per second. Multiplying the vector CD by an inverse of the matrix of cosines of unit vectors from the known location 230 to each of the GPS satellite locations at the measurement time yields a correction vector corrections for X, Y and Z which are added to the known location 230 to determine the unknown location 240.

Alternatively, instead of calculating the predicted code shift positions C_{a-n} as described above, the GPS receiver 180 located at the known position 230 can be used to measure the values directly. Using the GPS receivers, however, requires GPS receivers to be located at each base station.

Referring additionally now to Fig. 3, there is illustrated conveyance of a time reference to a reduced functionality GPS receiver 150 located within a cellular telephone 140. The distance R_a from the first GPS satellite 220_a to the known location 230 at the time of measurement is calculated in the manner described in Fig. 2, and the predicted code shift position C_a is calculated also in a manner described in Fig. 2. The same code shift position C_a is obtained in a correlator only if the base timing of the correlator code generator is properly synchronized with the GPS system. To obtain synchronization, the base timing of the GPS receiver 180 located at the base station 100 is set to yield the C_a code shift position as predicted. A reference point T_p on the base timing generator is selected and compared to the time of a base station 100 frame synchronization event T_x . The time difference between T_p and T_x is communicated to the base station 100 which communicates the difference to the reduced functionality GPS receiver 150 via the cellular telephone 140. The reduced functionality GPS receiver 150 uses the difference to set its internal timing base generator offset by an equal amount from its reception of the frame synchronization event.

-13-

Using any of a number of commonly known methods, correlation is effectuated using either hardware or software. Since the cellular telephone 140 is typically located within ten miles or less of the serving base station 100 and still closer to a central location 200, the code shift position transmitted to the reduced functionality GPS receiver 150 in the auxiliary information is very close to the actual code shift position for the location of the cellular telephone 140. Therefore, the code shift search space which the reduced functionality GPS receiver 150 must search is greatly reduced.

Using standard GPS hardware with simultaneous search engines (correlators), the reduced functionality GPS receiver 150 searches for the code shift position of a first GPS satellite 160 listed in the auxiliary information. Since it is possible that the signal strength of the first GPS satellite 160 to be searched maybe very weak, a long correlation time is used to achieve a processing gain. As an example, a one second correlation achieves a twenty decibel processing gain. Even at a very weak signal strength level, use of a hardware correlator simultaneously searching two hundred half code shift positions with a time reference accurate to within fifty microseconds yields a one second long parallel correlation of one hundred half code shift positions on either side of the predicted code shift position which is sufficient to find the exact code shift position for the GPS satellite 160.

Alternatively, if the time reference is not provided to the reduced functionality GPS receiver 150, a search of all one thousand twenty three possible code shift positions for the first GPS satellite 220, is preformed and once the actual code shift position is determined, an internal time reference based on the predicted code shift position for the first GPS satellite 220, is calculated.

-14-

Subsequent searches for the remaining GPS satellites 220_{b-n} code shift positions are thus reduced accordingly.

When all code shift positions have been identified, the reduced functionality GPS receiver 150 transmits the resulting pseudo ranges to the cellular telephone network 110 via the cellular telephone 140 and the base station 100, whereupon, the server 170 determines the geographical location of the cellular telephone 140. Alternatively, the reduced functionality GPS receiver 150 can calculate the geographical location using the pseudo ranges and transmit geographical coordinates back to the cellular telephone system 110 via the cellular telephone 140 and the base station 100.

The pseudo ranges or geographical coordinates can be transmitted to the cellular telephone network 110 in a variety of ways. For example, in a cellular telephone network using the Global System for Mobile communications protocol, information can be sent via a Short Messaging Service. The information is sent in a manner consistent with methods commonly known in the industry for the transmission of information between the cellular telephone 140 and the cellular telephone network 110. The controller 142 identifies the information as pseudo ranges or geographical coordinates and provides the information to the transceiver 141 for transmission to the base station 100.

In a second embodiment, the cellular telephone 140 is further equipped with an automatic frequency control feedback 210 to lock the clock frequency of the cellular telephone 140 to the carrier frequency of the base station 100. This allows Doppler corrections to be made with sufficient accuracy such that only a few attempts at Doppler correction are required to correlate the GPS satellite 160 signals.

Referring additionally now to Figure 4, there is illustrated a flow diagram of a preferred method for implementing the present invention. The location of a

-15-

base station of a cellular telephone network is determined (step 300). A server located at the base station obtains GPS ephemeris and, if available, timing information (step 305). The server obtains the GPS ephemeris information
5 either from a data service, or alternatively, from a GPS receiver located at the base station.

The server calculates auxiliary information (step 310) and calibrates base station timing (step 315). The server transmits the auxiliary and timing information
10 (step 320) to either an individual cellular telephone or broadcasts the information to all cellular telephones via a broadcast channel. The cellular telephone then communicates the information to reduced functionality GPS receiver located within the cellular telephone.

Using the transmitted data, the GPS receiver located
15 within the cellular telephone searches a code shift search space of a first GPS satellite (step 330) to determine the actual code shift position. Once the first code shift position is located, the GPS receiver recalibrates its timing (step 335) and corrects errors in the predicted
20 code shift positions for the remaining GPS satellites (step 340). The GPS receiver then searches the remaining code shift positions (step 350) and transmits location information (step 360) to the cellular telephone network
25 via the cellular telephone and the base station.

Although embodiments of the method and apparatus of
the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the
30 invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

-16-

WHAT IS CLAIMED IS:

1. An apparatus for reducing code shift searches in a reduced functionality global positioning receiver operating within a cellular telephone network comprising:
 - 5 means for obtaining global positioning system ephemeris information;
 - a server for calculating auxiliary information based on a known location and the ephemeris information; and
 - 10 means for communicating the auxiliary information to the reduced functionality mobile global positioning receiver.
2. The apparatus recited in claim 1, wherein the
15 known location is a geographical center of a metropolitan service area.
3. The apparatus recited in claim 1 further comprising a base station serving a cell site within which
20 the reduced functionality global positioning receiver is located and wherein the known location is a location of the base station.
4. The apparatus recited in claim 3, wherein the
25 means for obtaining global positioning system ephemeris information is a full functionality global positioning receiver located at the base station.
5. The apparatus recited in claim 3, wherein the
30 means for obtaining global positioning system ephemeris information is a data service.
6. The apparatus recited in claim 3, wherein the
35 means for communicating the auxiliary information is a cellular telephone.

-17-

7. The apparatus recited in claim 6, wherein the auxiliary information is communicated via a control channel of the cellular telephone.

5 8. The apparatus recited in claim 6, wherein the auxiliary information is communicated via a traffic channel of the cellular telephone.

10 9. The apparatus recited in claim 6, wherein the auxiliary information is communicated via a short messaging service message of the cellular telephone.

15 10. The apparatus recited in claim 3, wherein the server calculates the auxiliary information based on a center location of a sector of the cell site within which the global positioning receiver is located.

20 11. An apparatus for determining the geographical location of a cellular telephone comprising:
a transceiver located within the cellular telephone for receiving transmissions from a cellular telephone network containing auxiliary information; and
a reduced functionality global positioning receiver located within the cellular telephone functioning
25 to process the auxiliary information and calculates location indicating information. . .

30 12. The apparatus recited in claim 11, wherein the reduced functionality global positioning receiver calculates pseudo ranges and transmits the pseudo ranges to the cellular telephone network.

35 13. The apparatus recited in claim 11, wherein the reduced functionality global positioning receiver calculates geographical coordinates and transmits the coordinates to the cellular telephone network.

-18-

14. A method for reducing code shift search space in a reduced functionality global positioning system receiver operating within a cellular telephone network comprising the steps of:

- 5 determining a location of a base station serving a cell site of the cellular telephone network within which the global positioning system receiver is located;
- obtaining global positioning system ephemeris information;
- 10 calculating auxiliary information from the ephemeris information for use by the global positioning system receiver to perform code shift searches; and
- communicating the auxiliary information to the global positioning system receiver.

15

15. The method recited in claim 14, wherein the step of obtaining ephemeris information further includes the step of obtaining timing information.

20


16. The method recited in Claim 14, wherein the auxiliary information calculated by the cellular telephone network includes at least one of the following:



- a list of satellites in view of the base station;
- 25 a Doppler correction for each of the satellites in view of the base station;
- a code shift position for each of the satellites in view of the base station; and
- a code shift position for each of the satellites
- 30 in view of the base station.

35


17. The method recited in Claim 14, further including the step of determining a sector of the cell site within which the global positioning system receiver is operating, and wherein the step of calculating the auxiliary information by the cellular telephone network is based on the center location of the sector.

1 / 3

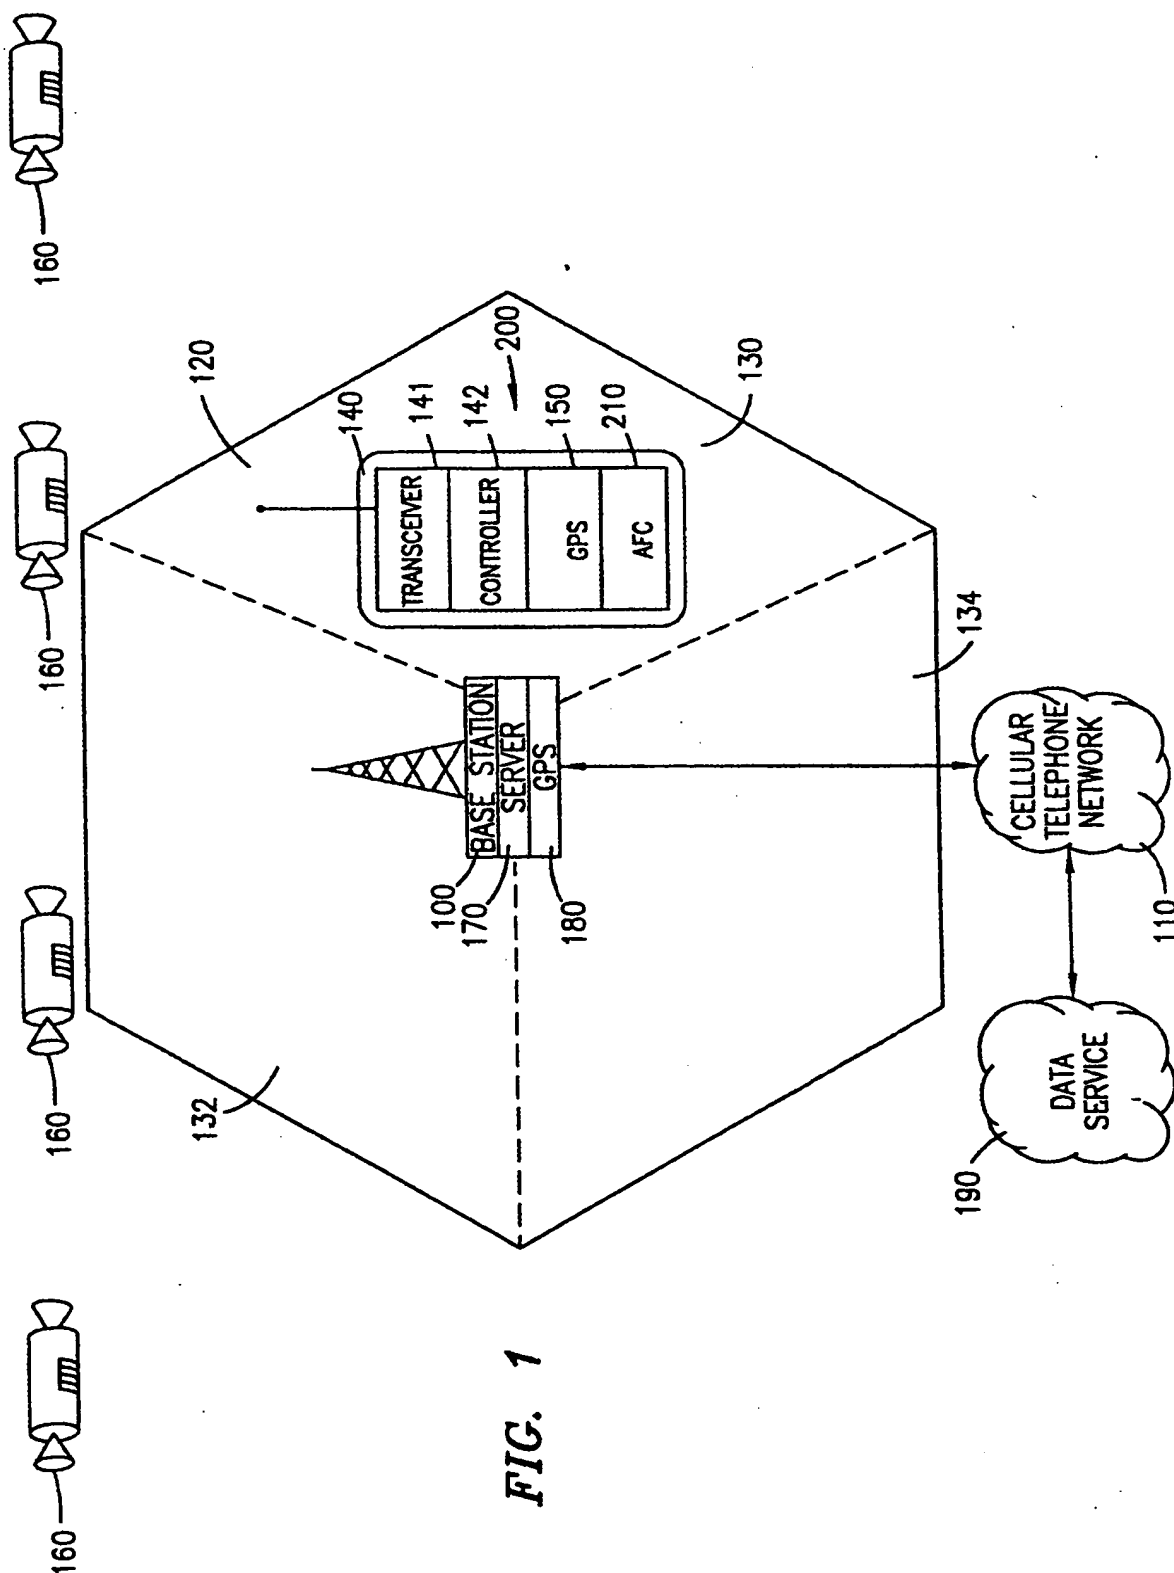

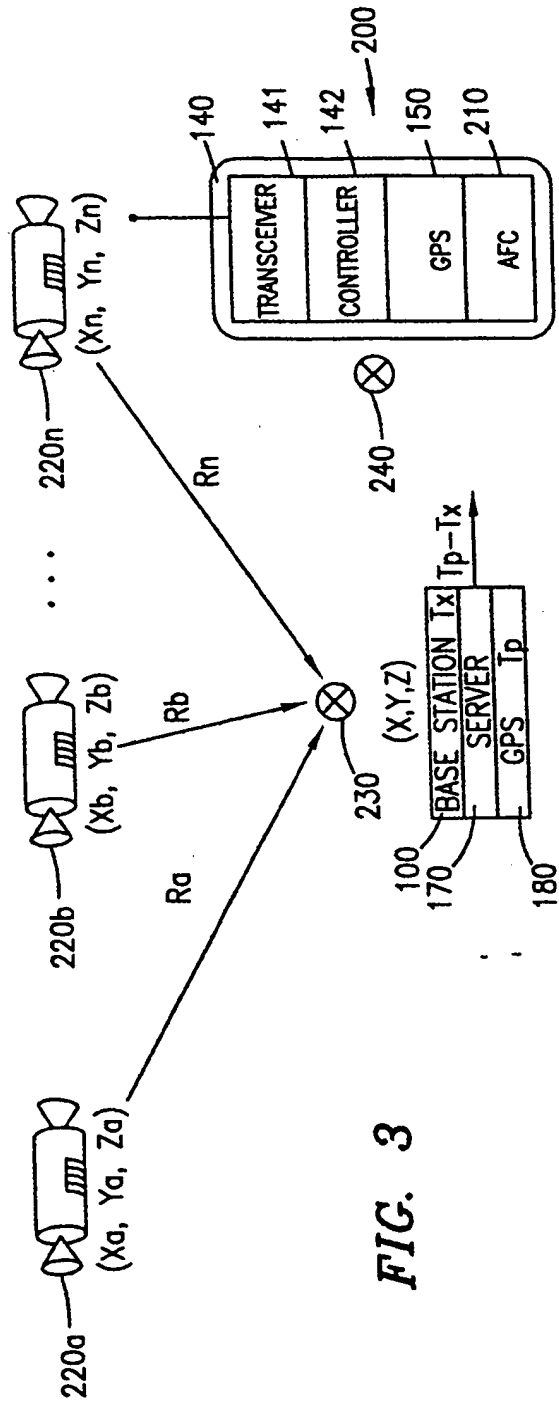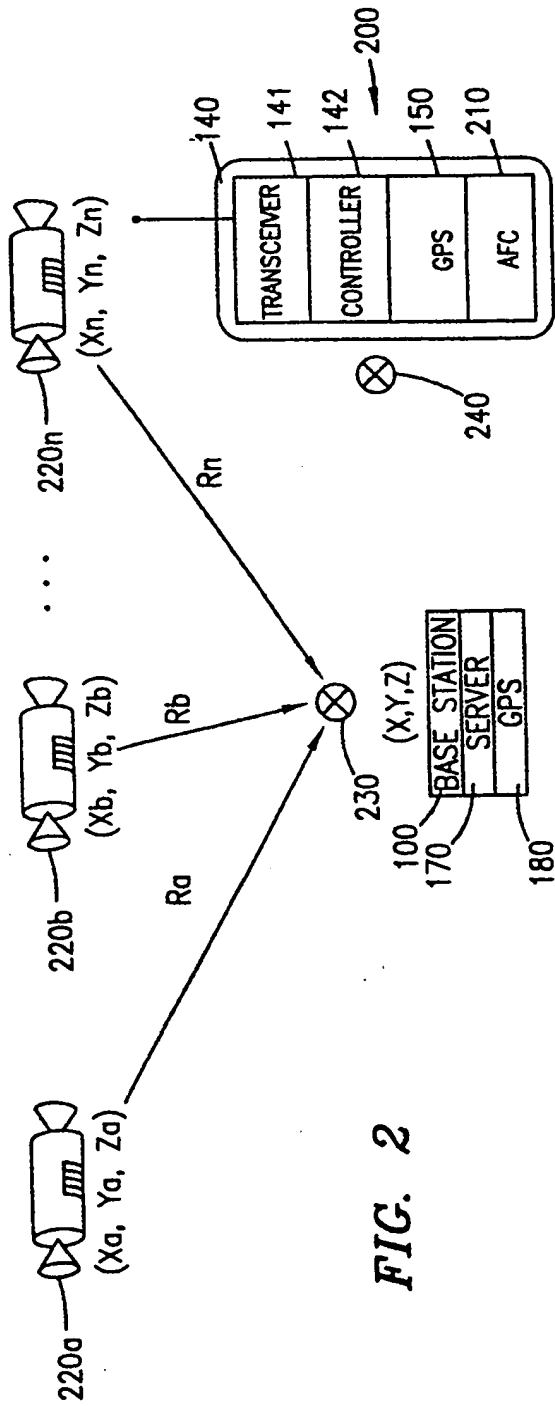

3 / 3

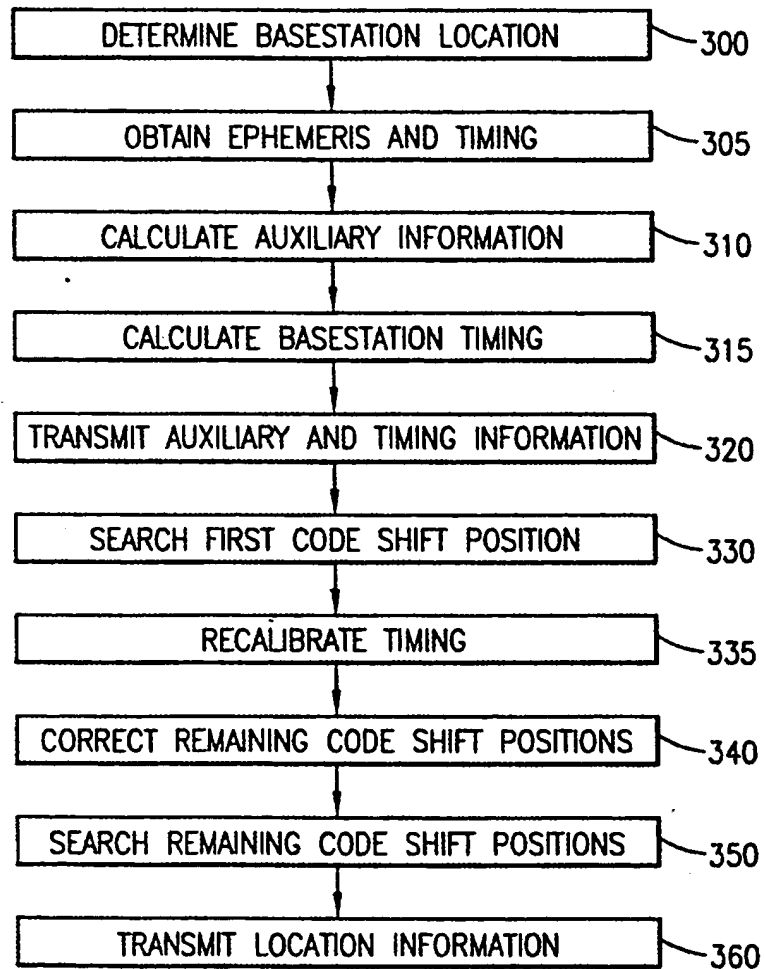**FIG. 4**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/21709

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G01S5/14 G01S1/04 G01S5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01S H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 33382 A (SNAPTRACK INC ;KRASNER NORMAN F (US)) 12 September 1997 see page 4, line 20 - line 29 see page 12, line 5 - line 8 see page 16, line 29 - line 31 see page 18, line 11 - line 14 ---	1,3-6, 11-15
X	GB 2 308 033 A (SYMMETRICOM INC) 11 June 1997	1,3-6, 11,14,15
Y	see page 6, line 24 - line 28 see page 5, line 3 - line 10 see page 6, line 1 - line 6 see page 6, line 12 - line 13 see page 7, line 24 - line 31 --- -/--	7-9



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 February 1999

Date of mailing of the international search report

22/02/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Niemeijer, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/21709

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 96 07110 A (MANNINGS ROBIN THOMAS ;BRITISH TELECOMM (GB); WALL NIGEL DAVID CHA) 7 March 1996 see page 10, line 7 - line 15 see page 15, line 4 - line 8 ---	8,9
Y	GB 2 264 837 A (KOKUSAI DENSHIN DENWA CO LTD) 8 September 1993 see abstract see page 6, line 7 - line 8 -----	7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/21709

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9733382 A	12-09-1997	US 5841396 A	24-11-1998
		AU 2070297 A	22-09-1997
		AU 7662096 A	30-04-1997
		CA 2230841 A	17-04-1997
		EP 0855039 A	29-07-1998
		EP 0885492 A	23-12-1998
		WO 9714049 A	17-04-1998
		AU 5587698 A	29-06-1998
		AU 5588898 A	29-06-1998
		WO 9825157 A	11-06-1998
		WO 9825158 A	11-06-1998
GB 2308033 A	11-06-1997	AU 1036797 A	27-06-1997
		CA 2238949 A	12-06-1997
		EP 0866983 A	30-09-1998
		WO 9721109 A	12-06-1997
WO 9607110 A	07-03-1996	AU 684228 B	04-12-1997
		AU 3393195 A	22-03-1996
		AU 695816 B	20-08-1998
		AU 5538998 A	23-04-1998
		CA 2198886 A	07-03-1996
		DE 69506563 D	21-01-1999
		EP 0777863 A	11-06-1997
		EP 0837341 A	22-04-1998
		FI 970848 A	28-02-1997
		JP 10505420 T	26-05-1998
		NO 970940 A	28-02-1997
		NZ 292210 A	28-07-1998
GB 2264837 A	08-09-1993	JP 5232210 A	07-09-1993